



Ceramiche  
*San Nicola*

*earthstone*



Earthstone is the new stone looks serie  
created to give a unique design  
to you interior and exterior projects

6" x 24"  
15 x 60



*grey*



*mix*



*black*



*brown*



*beige*



*white*





*earthstone grey*








*earthstone mix*








*earthstone black*

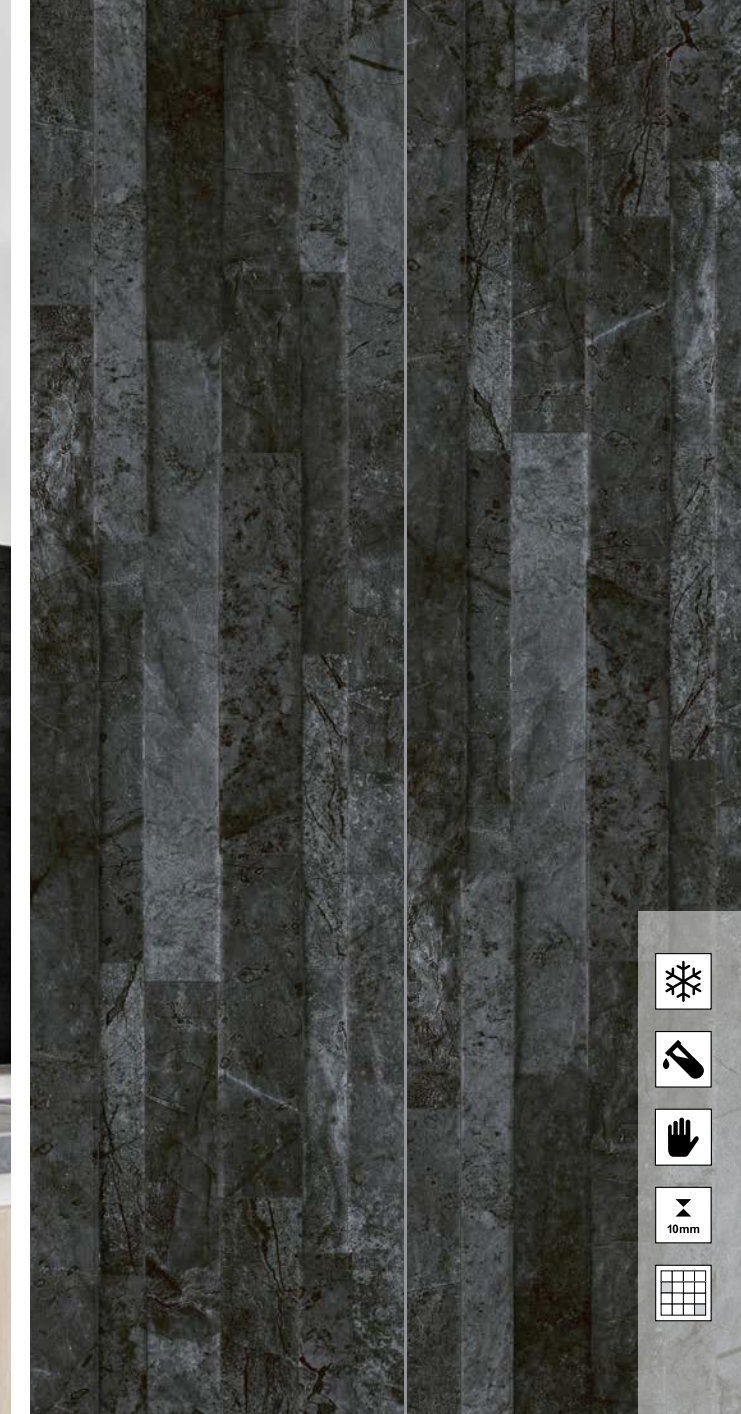

-  Snowflake icon
-  Water drop icon
-  Hand icon
-  10mm gap icon
-  Grid icon



*earthstone brown*

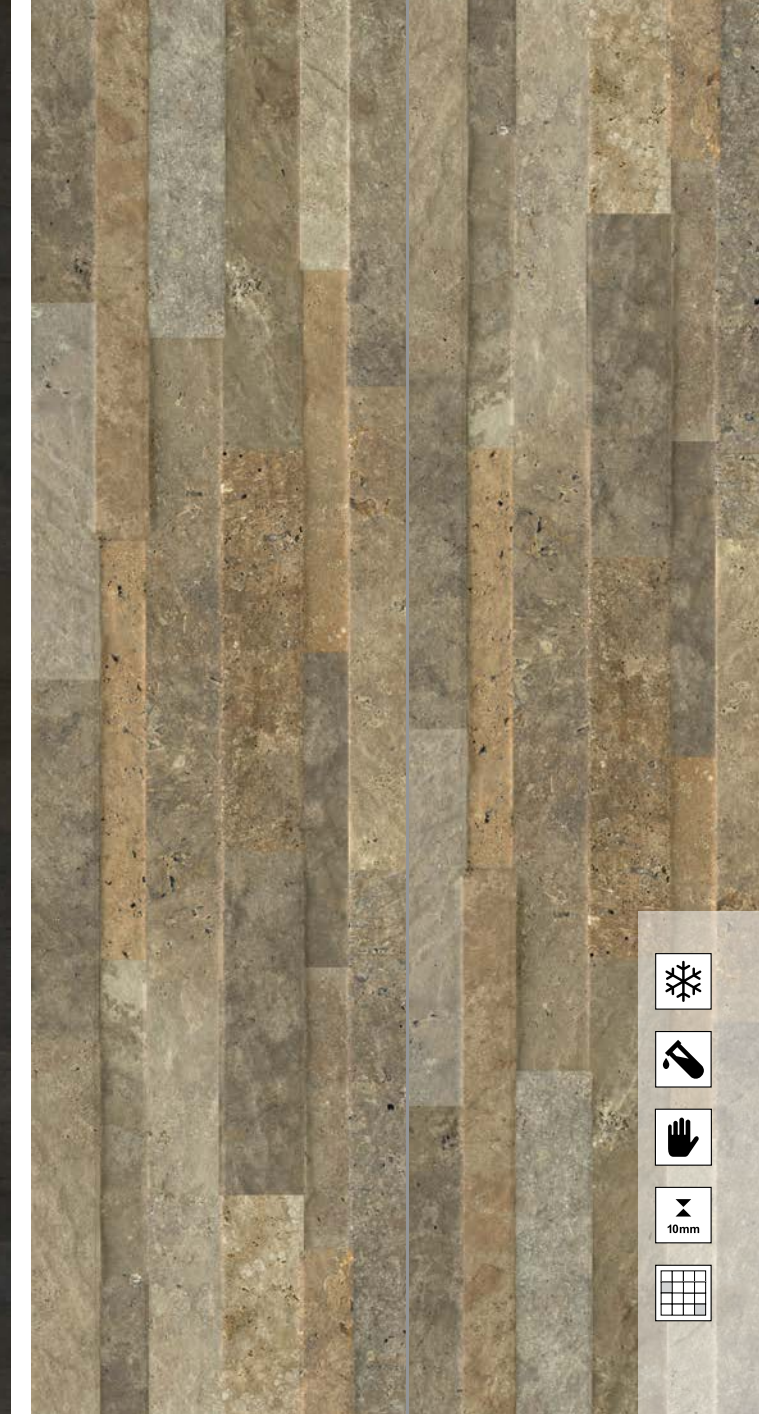


-  Snowflake icon
-  Water drop icon
-  Hand icon
-  10mm gap icon
-  Grid icon





*earthstone beige*

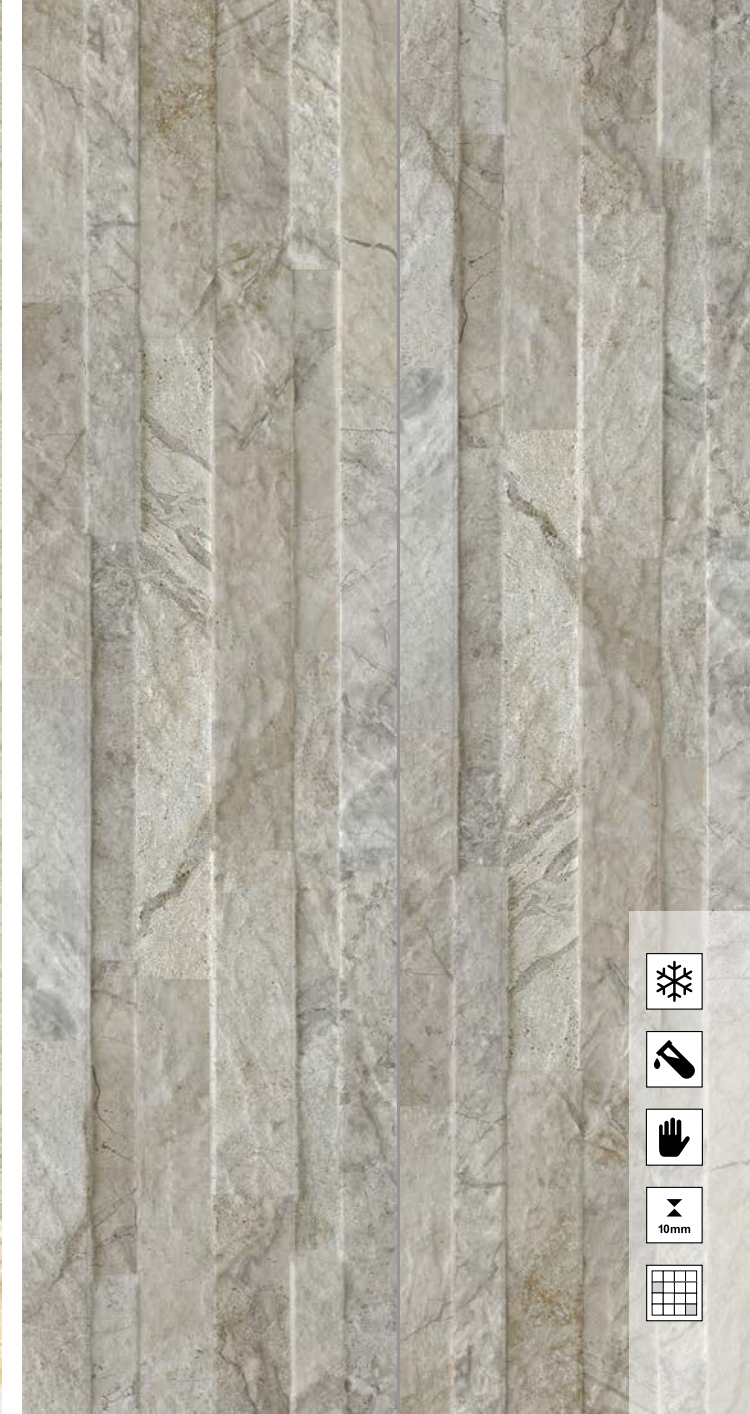

- 
- 
- 
- 
- 
- 





*earthstone white*



Piastrelle indicate per rivestimento interno/esterno. Tiles specifically used for wall coverings.



Spessore. Thickness.



Resistenza al gelo. Frost resistance.



Resistenza all'attacco chimico. Chemical resistance.



V1 Piastrelle a tono uniforme. Tiles with uniform shade appearance.



V2 Piastrelle con lieve variazione di tono e disegno. Tiles with slight shade and aspect variation.



V3 Piastrelle con media variazione di tono e disegno. Tiles with moderate shade and aspect variation.



V4 Piastrelle con variazione random di tono e disegno. Tiles with random shade and aspect variation.









## IMBALLAGGI PACKINGS









FORMATO size	SCATOLE boxes		PALETT pallets		
	PEZZI pieces	MQ	BOX	MQ	KG
15x60	15	1,35	50	67,50	1158

Peso paletta defumicata Kg20 - Peso paletta eur/simil eur Kg25

# CARATTERISTICHE TECNICHE

## TECHNICAL FEATURES

<b>UNI EN 14411_IGRUPPO BLA GL</b> Pavimenti e Rivestimenti in Gres Porcellanato_ Stoneware Wall and FloorTile Boden und Wandfliesen aus Feinsteinzeug Porcelain Sols et Carreaux de Mur en Grès Cérame Vitrifié			
CARATIERISTICHE TECNICHE TECHNICAL FEATURES TECHNISCHE EIGENSCHAFTEN CARACTERISTIQUES TECHNIQUES	NORMA NORM NORME REGULATION	VALORI PRESCRITTI INTERNATIONAL STANDARD INTERNATIONALE NORMWERTE VALEURS PRESCRITES	VALORI MEDI AVERAGE VALUE MITTELWERT VALEURS MOYENNES
 <b>LUNGHEZZA E LARGHEZZA</b> LENGHT AND WIOTH LAENGE UNDBREITE DER FLIESE LONGUEUR ET LARGEUR	UNI EN ISO 10545-2	±0,6%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>SPESSORE</b> THICKNESS STAERKE EPAISSEUR	UNI EN ISO 10545-2	±5%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RETTILINEITÀ DEGLI SPIGOLI</b> STRAIGHTNESS GERALDLINGKEIT EQUERRAGE DES ANGLES	UNI EN ISO 10545-2	± 0,5%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>ORTOGONALITÀ</b> RECTANGULARITY RECHTWINKLIGKEIT ORTHOGONALITE	UNI EN ISO 10545-2	±0,6%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>PLANARITÀ</b> WARPAGE EBENFLACHIGKEIT PLANEITE	UNI EN ISO 10545-2	±0,5%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>ASSORBIMENTO D'ACQUA</b> WATER ABSORPTION WASSERAUFNAHME ABSORPTION D'EAU	UNI EN ISO 10545-3	≤ 0,5%	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA ALLA FLESSIONE</b> BREAKING STRENGHT BIEGEFESTIGKEIT RESISTANCE A LA FIEXION	UNI EN ISO 10545-4	> 35N/mm <sup>2</sup>	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>FORZA DI ROTTURA</b> BREAKING FORCE IN N BRUCHLAST IN N CHARGE DE RUPTURE	UNI EN ISO 10545-4	-	-

<b>UNI EN 14411_IGRUPPO BLA GL</b> Pavimenti e Rivestimenti in Gres Porcellanato_ Stoneware Wall and FloorTile Boden und Wandfliesen aus Feinsteinzeug Porcelain Sols et Carreaux de Mur en Grès Cérame Vitrifié			
CARATIERISTICHE TECNICHE TECHNICAL FEATURES TECHNISCHE EIGENSCHAFTEN CARACTERISTIQUES TECHNIQUES	NORMA NORM NORME REGULATION	VALORI PRESCRITTI INTERNATIONAL STANDARD INTERNATIONALE NORMWERTE VALEURS PRESCRITES	VALORI MEDI AVERAGE VALUE MITTELWERT VALEURS MOYENNES
 <b>CARICO DI ROTTURA</b> BREAKING FORCE IN N BRUCHLAST IN N CHARGE DE RUPTURE	UNI EN ISO 10545-4	1.300 N min	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA AGLI SBALZI TERMICI</b> THERMAL SHOCK RESISTANCE TEMPERATURWECHSELBESTAENDIGKEIT RESISTANCE AUX CHOCS THERMIQUES	UNI EN ISO 10545-9	NESSUN DANNO NO DAMAGE KEIN SHADEN AUCUN DOMMAGE	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA AL CAVILLO</b> CRAZING RESISTANCE HAARISS-BESTAENDIGKEIT RESISTANCE AUX CRAQUELLURES	UNI EN ISO 10545 11	MPD	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA AL GELO</b> FROST RESISTANCE FROSTBESTAENOIGKEIT RESISTANCE AU GEL	UNI EN ISO 10545 12	RICHIESTA REQUEST	RESISTENTE RESISTANT BESTAENOIG RESISTANT
 <b>RESISTENZA ALL'ATTACCO CHIMICO</b> CHEMICAL RESISTANCE SAEUERE-LAUWEBESTANDIGKEIT RESISTANCE A L' ATTAQUE CHIMIQUE	UNI EN ISO 10545-13	CLASSE UB min	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA ALLE MACCHIE</b> STAIN RESISTANCE BESTAENDIGKEIT GEGEN FLECKEN RESISTANCE AUX TACHES	UNI EN ISO 10545-14	CLASSE 3 min	CONFORME IN ACCORDANCE ENTSPRECHEND CONFORME
 <b>RESISTENZA ALLO SCIVOLAMENTO</b> SLIP RESISTANCE RUTSCHFESTIGKEIT RESISANCE AU GLISSEMENT	DIN 51130 ASTM-C 1028	ATTRITO SODDISFACENTE SATISFACTORY FRICTION BEFRIEDIGENDE REIBUNG FRICTION SATISFAISANTE	-
 <b>RESISTENZA ALL'ABRASIONE</b> ABRASION RESISTANCE ABRIEBFESTIGKEIT RESISTENCE A LA ABRASION	UNI EN ISO 10545-7	Classi di abrasione da I a V Abrasion class from da I to V Abriebklassen I bis V Classe d' abrasion da I à V	-





**CERAMICHE SAN NICOLA s.r.l.**



Contrada Boscarello a.c.

70033 Corato - Bari - Italy

**Tel.** +39 080 8987330 / **Fax** +39 080 8981524

[info@ceramichesannicola.it](mailto:info@ceramichesannicola.it)

[www.ceramichesannicola.it](http://www.ceramichesannicola.it)

 Ceramiche San Nicola  [ceramichesannicola](https://www.instagram.com/ceramichesannicola)